



techsystem

automatyka klimatyzacja wentylacja

▸ zapoznaj się z naszą ofertą

CD-Pxx-00-0 Series Duct Mount CO₂ Transmitter

Johnson Controls offers a full line of Carbon Dioxide (CO₂) transmitters for measuring and transmitting CO₂ levels, ranging from 0 to 2,000 parts per million (ppm), within Heating, Ventilating, and Air Conditioning (HVAC) applications. Specific HVAC CO₂ applications include: Demand Control Ventilation (DCV), fresh air and Indoor Air Quality (IAQ), and rooftop air handling Economizer controls systems.

These compact, duct-mounted devices output 0 to 10V, 0 to 20 mA, or 4 to 20 mA signals and feature a relay output as an optional feature. They are designed to work:

- in standalone mode
- connected to Metasys® system or the AD-DME series controllers
- as part of any integrated Building Automation System (BAS)

The new CO₂ transmitters are easy to install, offer a full three year warranty, and require no maintenance or field calibration.



Figure 1: Duct Mount Transmitter with Conduit Adaptor and Mounting Flange

Features and Benefits

<input type="checkbox"/> Energy Savings from DCV Strategies	Offers potential for 10 to 70% energy savings
<input type="checkbox"/> CARBOCAP® Single-beam, Dual-wavelength Design	Provides superior performance compared to other technologies
<input type="checkbox"/> CARBOCAP Silicon, Micro-machined Construction	Provides reliable CO ₂ measurement in duct environments
<input type="checkbox"/> Calibration Reliability	Offers five years of reliable calibration
<input type="checkbox"/> Adjustable Duct Probe Depth	Permits optimal placement of sensing tip in a duct
<input type="checkbox"/> Extended (Optional) Features	Offers relay output for fan control

Product Overview

This transmitter uses a completely new CO₂ sensing technology. The silicon-based CARBOCAP sensor provides stability and reliability.

The CARBOCAP sensor operates in accordance with the single-beam, dual-wavelength method. This patented sensor has unique reference measurement capabilities, offering excellent stability over both time and temperature. The monolithic Fabry-Perot Interferometer (FPI) chip utilizes the optical, mechanical, and electronic properties of silicon at the same time.

The transmitter is factory set to measure CO₂ levels up to 2,000 (ppm). It requires a Class 2, 24 VDC/VAC power source and generates an output signal proportional to the CO₂ level detected. The duct-mounted CO₂ transmitter series offers:

- standard CO₂ transmitter
- transmitter with relay output

IMPORTANT:	The CD-Pxx-00-0 transmitters are intended to provide input to equipment under normal operating conditions. Where failure or malfunction of the device could lead to an abnormal operating condition that could cause personal injury or damage to the equipment or other property, other devices (limit or safety controls), or systems (alarm or supervisory) intended to warn of, or protect against, failure or malfunction of the device must be incorporated into and maintained as part of the control system.
-------------------	--

Calibration

Johnson Controls CO₂ transmitters are calibrated using certified gases for the following:

- output signal (0 to 10V) proportional to CO₂ concentration (0 to 2,000 ppm)
- altitude range of 0 to 1,969 ft (0 to 600m) above sea level without compensation
- relay output trigger point set for 1,000 ppm (in models featuring the optional relay output)

CARBOCAP Technology

Johnson Controls is licensed to integrate the new, silicon-based CARBOCAP CO₂ sensor into HVAC or Building Automation Systems. This sensor has several advantages: high accuracy, excellent stability, negligible temperature dependence, and ease of installation.

The structure of the diffusion-aspirated, single-beam dual-wavelength sensor is remarkably simple. It consists of an Infrared (IR) source, a sample cell, a tunable-interference filter, and an IR detector. The tunable-interference filter enables measurements at two wavelengths. As a result, references are measured accurately, without the typically broad tolerances inherent in dual-beam sensors.

Dust, water vapor, and most chemicals do not affect the measurement accuracy of the sensor. No special software compensation patches are required.

Packaging Innovation

Johnson Controls offers the industry's first duct-mount package that is Underwriters Laboratories, Inc.® (UL) Listed and requires no separate hardware. This product includes a strain relief/conduit adapter for connecting to standard 1/2 in. fittings. The CARBOCAP sensor is not affected by typical airflow rates encountered in ducts or rooftop air handlers.

The compact design of the device requires only a small hole in the ventilation duct, which eliminates the problems associated with leaking gaskets. The enclosure reduces material and labor costs by offering an integrated product; no "pressurized" boxes, pitot pickups, or tubing and fittings are required.

Energy Efficiency

Using the CO₂ transmitter duct probe results in considerable savings in installation, operation, and maintenance costs with no recalibration expenses.

Johnson Controls CO₂ transmitters, when used with BAS/Economizer controllers (featuring DCV strategies), can generate energy savings ranging up to:

- 20 to 40% in office buildings
- 20 to 60% in restaurants/light retail facilities
- 10 to 70% in educational/business settings

Dimensions

See Figure 2 and Figure 3 for CO₂ transmitter and mounting flange dimensions.

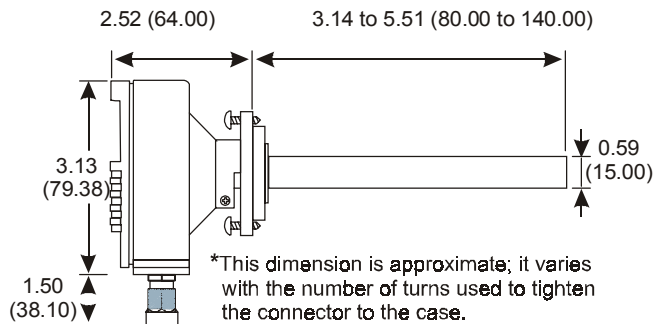


Figure 2: Transmitter Dimensions, in. (mm)

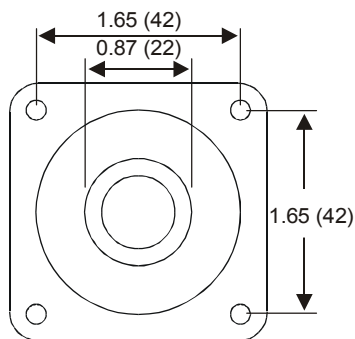


Figure 3: Mounting Flange Dimensions, in. (mm)

Optional Feature

Relay Module

For applications where On/Off ventilation or fan control is required to provide fresh air, order the CD-PR0-00-0 transmitter. This model includes a relay output module that plugs into the main Printed Circuit Board (PCB) offering a 30V, 0.5A Class 2 output with configurable On and Off trip points. Default On is 1,000 ppm, and default Off is 950 ppm.

Note: To redefine the relay On and Off trip points to suit the application, use the ACC-CD-S Relay Setpoint Software.

Repair and Replacement

The device is not field repairable.

Altitude Compensation

These devices are intended for an altitude range of 0 to 1,969 ft (0 to 600m) without compensation. To compensate for higher altitudes, refer to the installation instructions for this device.

Ordering Information

Contact the nearest Johnson Controls representative to order a CO₂ transmitter, and specify the desired product code number from Table 1. Refer to Table 2 for replacement parts and Table 3 for accessories available for the duct-mount CO₂ transmitter.

Table 1: CO₂ Transmitters

Product Code Number	Description
CD-P00-00-0	Duct Mount CO ₂ Transmitter
CD-PR0-00-0	Duct Mount CO ₂ Transmitter with Relay

Table 2: Replacement Parts for Duct Mount CO₂ Transmitters

Product Code Number	Description
ACC-CD-R	Relay Output Module for use in CD-P00-00-0 or CD-PR0-00-0
ACC-CD-CFK1	Conduit Adaptor Kit

Table 3: Accessories for Duct Mount CO₂ Transmitters

Product Code Number	Description
ACC-CD-S	Relay Setpoint Software Kit; includes software and interface cable to reset the On and Off relay setpoints for CD-PR0-00-0
Y65T31-0	Multiple Primary Transformer, 40 VA, 120/208/230V Primary, 24V Class 2 Secondary with Screw Terminals: Foot Mounting or 4 x 4 in. (101.6 x 101.6 mm) Plate

Notes

Notes

Notes

Specifications

Product	CD-Pxx-00-0 Series Duct Mount CO ₂ Transmitter
Measuring Range	0 to 2,000 ppm CO ₂
Accuracy at 77°F (25°C)	<± (30 ppm CO ₂ + 2.0% of reading) (includes manufacturing deviation and drift). All accuracy specifications reflect testing the transmitters using high-grade, certified gases. Transmitters are intended for an altitude range of 0 to 1,969 ft (0 to 600m) above sea level without compensation. To compensate for higher altitudes, see the Johnson Controls installation instructions for this device.
Non-Linearity	<0.5% of Full Scale
Temperature Dependence of Output	<0.056% of Full Scale/F° (<0.1% of Full Scale/C°)
Long-Term Stability	<±5.0% of Full Scale/5 Years
Response Time (0 to 63%)	1 Minute
Operating Temperature Range	23 to 113°F (-5 to 45°C)
Storage Temperature Range	-4 to 158°F (-20 to 70°C)
Humidity Range	0 to 85% RH (non-condensing)
Transmitter Output Signals	
CO₂	Jumper Selectable: 0 to 20 mA or 4 to 20 mA or 0 to 10 VDC (Default) Maximum Output Current: 25 mA; Maximum Output Voltage: 12.5V
Relay Output (Optional)	Maximum 30V, 0.5A, Class 2
Recommended External Load	Current Output: Maximum 500 ohms Load Resistance Voltage Output: Minimum 1,000 ohms Load Resistance
Power Supply Range	20 to 30 VAC (18 to 30 VDC), Class 2
Power Consumption	<2.5W Average, 4.1 VA
Warmup Time	<5 Minutes
Air Flow Range	0 to 7,500 ft/minute (0 to 2,286 m/minute)
Duct Probe Material	Duct probe meets plenum rating requirements of UL 1995, Heating and Cooling Equipment.
Housing Material	ABS Plastic
Dimensions (H x W x D)	3-1/8 x 3-3/16 x 8 in. (80 x 81 x 204 mm)
Shipping Weight	0.3 lb (140g)
Agency Listings	UL Listed, CCN XAPX (US) and XAPX7 (Canada); EMC Directive (CE Mark), 89/336/EEC; FCC and DOC Compliant

The performance specifications are nominal and conform to acceptable industry standards. For application at conditions beyond these specifications, consult the local Johnson Controls office. Johnson Controls, Inc. shall not be liable for damages resulting from misapplication or misuse of its products

Controls Group
507 E. Michigan Street
P.O. Box 423
Milwaukee, WI 53201

www.johnsoncontrols.com
Printed in U.S.A.